

# LMW-4320

## UHD/4K HDR Monitor

- 3840 × 2160, 10bits Panel
- Rec.709, P3, Rec.2020, S-Gamut
- HLG, PQ, SLog3 and SDR
- 3G-SDI QUAD LINK
- 2SI and Quad Division



Designed for 4K HDR broadcast and post production application, LMW4320 supports Gamma 2.2, 2.4, 2.6, HLG, PQ and SLog3 EOTF; Rec.709, P3, Rec.2020, S-Gamut color space. It has quad-link 3G-SDI inputs that can support HD-SDI and 3G-SDI HD/2K signal, 2SI and quad division UHD/4K signal.

## Signal Format:

### HD:

720 p23.98, 24, 25, 29.97, 30, 50, 59.94, 60; 1080 psf23.98, 24, 25, 29.97, 30; 1080 i50, 59.94, 60;  
1080 p23.98, 24, 25, 29.97, 30, 50, 59.94, 60

### 2K:

2K psf23.98, 24, 25, 29.97, 30; 2K p23.98, 24, 25, 29.97, 30, 50, 59.94, 60

### UHD:

2160 p23.98, 24, 25, 29.97, 30, 50, 59.94, 60


### 4K:

4K p23.98, 24, 25, 29.97, 30, 50, 59.94, 60

## Dimensions:

720X442.4X78.3 (mm)

28.3X17.42X2.8 (inch)

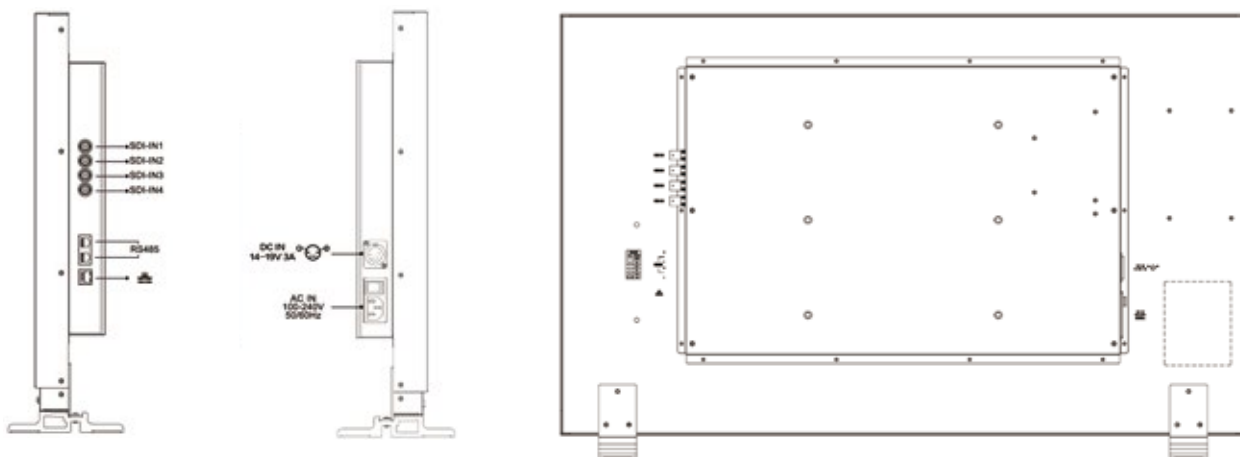

\*subject to change without notice

## Osee Technology Ltd.

Tel: +86 10 62434168 ext 8017

Web: [www.osee-dig.com](http://www.osee-dig.com)

Mail: [sales@osee-dig.com](mailto:sales@osee-dig.com)